

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 July 2003 (31.07.2003)


PCT

(10) International Publication Number
WO 03/062160 A1

- (51) International Patent Classification⁷: **C03B 37/075**, 37/012, G02B 6/16
- (21) International Application Number: **PCT/GB03/00289**
- (22) International Filing Date: 23 January 2003 (23.01.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0201492.6 23 January 2002 (23.01.2002) GB
- (71) Applicant (for all designated States except US): **BLAZEPHOTONICS LIMITED** [GB/GB]; Finance Office, University of Bath, The Avenue, Claverton Down, Bath, Avon BA2 7AY (GB).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **KNIGHT, Jonathan, Cave** [GB/GB]; Canteen Cottage, Canteen Lane, Wellow, Bath, Avon BA2 8PY (GB). **RUSSELL, Philip, St.John** [GB/GB]; Shepherd's Mead, Southstoke, Bath, Avon BA2 7EB (GB). **BIRKS, Timothy, Adam** [GB/GB]; 14 Horsecombe Brow, Combe Down, Bath, Avon BA2 5QY (GB).
- (74) Agents: **CRITTEN, Matthew, Peter et al.**; Abel & Imray, 20 Red Lion Street, London WC1R 4PQ (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,

[Continued on next page]

(54) Title: A METHOD OF MANUFACTURING AN OPTICAL FIBRE, A PREFORM AND AN OPTICAL FIBRE

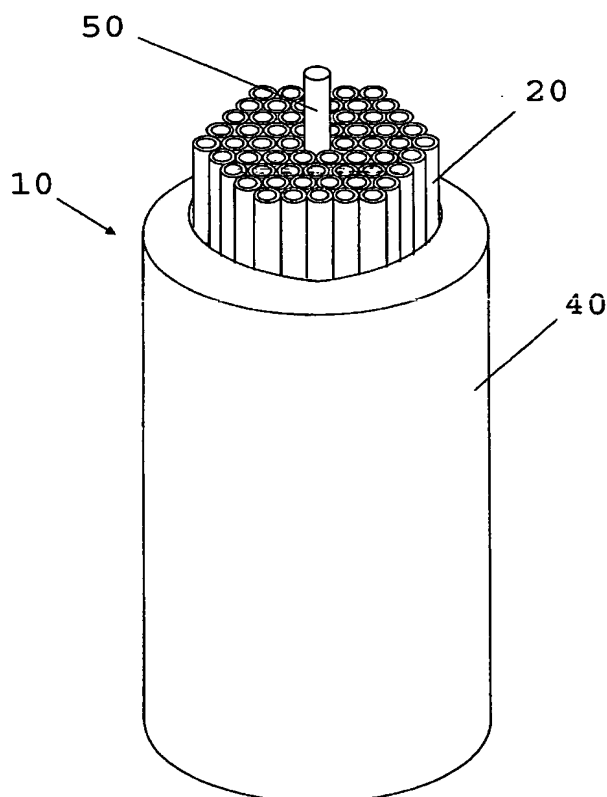

(57) Abstract: A method of manufacturing an optical fibre, comprises: (i) forming a preform (10) for drawing into the fibre, the preform (10) comprising a bundle of elongate elements (20,50) arranged to form a first region that becomes a cladding region of the fibre and a second region that becomes a core region of the fibre; (ii) drawing the preform (10) into the fibre. The bundle of elongate elements (20,50) comprises a plurality of elongate elements (20) of a lower purity dielectric material and at least one elongate element (50) of a higher purity dielectric material. The first region comprises a plurality of the lower purity elements (20) and the second region comprises the higher purity element (50).

WO 03/062160 A1



SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A METHOD OF MANUFACTURING AN OPTICAL FIBRE, A PREFORM AND AN OPTICAL FIBRE

This invention relates to the field of optical fibres.

5 Optical fibres are widely used in applications such as telecommunications. Such fibres are typically made entirely from solid materials such as glass, with each fibre having the same cross-sectional structure along its length. Transparent material in one part (usually the middle) of the cross-section
10 has a higher refractive index than material in the rest of the cross-section and forms an optical core. Light is guided in the optical core by total internal reflection from the material surrounding the core, which forms a cladding region. We refer to such a fibre as a conventional fibre or a standard
15 fibre.

 Most standard fibres are made from fused silica glass, incorporating a controlled concentration of dopant, and have a circular outer boundary typically of diameter 125 microns. Standard fibres can be single-mode or multimode.

20 Applications often require very great lengths of optical fibre, typically tens or even hundreds of kilometres. Optical losses are therefore a very important technical consideration, as even a small loss per metre can seriously attenuate signals that are guided over such long distances in a fibre.
25 Moreover, many applications requiring shorter lengths of fibre, such as fibre lasers, may be highly sensitive to loss.

 One way of specifying the purity of glass is by its bubble class. High purity glass has a bubble class of 0 or 1. Another way is by its OH⁻ content. High purity glass typically
30 has an OH⁻ concentration of < 10 ppm.

 Various techniques have been developed to produce standard optical fibre of high optical quality; such techniques are well known and include modified chemical vapour deposition (MCVD), outside vapour deposition (OVD), vapour
35 axial deposition (VAD) and plasma-enhanced chemical vapour deposition (PECVD). Typical optical losses for fibres made by

such techniques are around 0.2 dB/km at a wavelength of 1550nm and around 3-5 dB/km at a wavelength of 850nm.

However, production of high-purity glass by prior-art techniques is difficult, costly, and is specific to the production of a certain type of preform.

In the past few years a non-standard type of optical fibre has been demonstrated, called the photonic crystal fibre (PCF) [J. C. Knight et al., Optics Letters v. 21 p. 203]; such fibres have alternatively been called holey fibres or microstructure fibres. Typically, a PCF is made from a single solid material such as fused silica glass, within which is embedded an array of holes. Those 'holes' are usually air holes but may alternatively be, for example, regions of a solid material (e.g. silica doped with impurities to change its refractive index). The holes run parallel to the fibre axis and extend the full length of the fibre. A region of solid material between holes, larger than neighbouring such regions, can act as a waveguiding fibre core. Light can be guided in this core in a manner analogous to total-internal-reflection guiding in standard fibres. One way to provide such an enlarged solid region in a fibre with an otherwise periodic array of holes is to omit one or more holes from the structure. However, the array of holes need not be periodic for total-internal-reflection guiding to take place (we nevertheless refer to such a fibre as a photonic-crystal fibre).

Another mechanism for guiding light in PCFs is based on photonic bandgap effects rather than total internal reflection. For example, light can be confined inside a hollow core (an enlarged air hole) by a suitably-designed array of smaller holes surrounding the core [R. F. Cregan et al., Science v. 285 p. 1537]. True guidance in a hollow core is not possible at all in conventional fibres.

PCFs can be fabricated by stacking glass elements (rods and tubes) on a macroscopic scale to form a bundle having the required pattern and shape, and holding them in place while

fusing them together. This primary preform can then be drawn into a fibre, using the same type of fibre-drawing tower that is used to draw standard fibre from a standard-fibre preform. The primary preform can, for example, be formed from fused
5 silica elements with a diameter of about 0.8 mm.

Thus, the prior-art method of manufacturing PCFs having low loss requires a large number of high-purity rods and tubes, each having a relatively small diameter compared with preforms for standard fibres. However, prior art methods of
10 manufacturing high-purity glass rods are not well suited to making high-purity tubes suitable for use in a PCF preform. Furthermore, most manufacturers of high-purity glass are tooled for making large boules of the glass and so making small rods requires custom manufacturing runs and is therefore
15 expensive.

An object of the invention is to provide an improved method of manufacture that enables production of low-loss PCF at a reduced cost.

According to the invention there is provided a method of
20 manufacturing an optical fibre, comprising: (i) forming a preform for drawing into the fibre, the preform comprising a bundle of elongate elements arranged to form a first region that becomes a cladding region of the fibre and a second region that becomes a core region of the fibre; (ii) drawing
25 the preform into the fibre, characterised in that (a) the bundle of elongate elements comprises a plurality of elongate elements of a lower purity dielectric material and at least one elongate element of a higher purity dielectric material and (b) the first region comprises a plurality of the lower
30 purity elements and the second region comprises the higher purity element.

Preferably, the higher purity dielectric material has a bubble class of 0 or 1. The lower purity dielectric material then has a higher bubble class, for example 2 or higher.
35 Preferably, the dielectric material is glass. Preferably, the

higher purity glass has an OH^- content of < 1 ppm. The lower purity glass may have an OH^- content of > 10 ppm.

Because most of the energy in a guided lowest-order mode is concentrated near to the centre of that mode, it is possible for the fibre to exhibit a low optical loss without it being necessary for all of the cladding region and all of the core region to be made out of the higher purity material; indeed, it is not even necessary for all of the core region to be made out of the higher purity material. The cost and difficulty of making low-loss fibre may thereby be reduced because the higher purity material is only used in a part of the fibre.

The core region is considered to be the part of the fibre in which light is guided rather than evanescent.

The second region may comprise a plurality of higher purity elements; thus a fibre with a larger higher purity core may be made. The first region may include at least one higher purity element. The first region may include a ring of higher purity elements that substantially surround, and are adjacent to, the second region.

The second region may include at least part of at least one of the lower purity elements, such that the core region of the drawn fibre includes lower purity material as well as higher purity material. The second region may include a plurality of the lower purity elements. The second region may include at least part of the elements forming an innermost ring of lower purity elements that substantially surround, and are adjacent to, the higher purity element(s). It may be that the only parts of the elements forming the ring that are included in the second region are the parts of the elements adjacent to the cane. The second region may include all of the ring.

Thus, although the mode may have an extensive cross-section, most of the light energy is at the mode's centre, and it is the optical quality of the glass forming the part of the

fibre core in which most of the light is concentrated that is most significant in determining loss.

The elongate elements may have any suitable cross-section or any combination of cross-sections for formation of the preform; for example, the elongate elements may be canes or tubes of circular or other cross-section. The tubes may be capillaries. The tubes may be larger tubes that surround a plurality of canes or capillaries in the preform.

Preferably, the drawn fibre is a photonic crystal fibre such that the cladding region of the drawn fibre comprises a plurality of elongate bodies of a first refractive index embedded in a matrix material of a second refractive index, different from the first. Preferably, the lower purity elements comprise an outer portion that forms the matrix material and an inner portion that forms the elongate body, in the cladding region of the drawn fibre. For example, the lower purity elements may be dielectric tubes, such that the inner portion is a hole.

In PCFs, the light will often be guided in a star-shaped lowest-order mode that spreads into the part of the fibre in which holes are found (The holes in the fibre result from the holes in the tubes of the preform).

Preferably, the higher purity element(s) is/are a cane or canes.

Also according to the invention there is provided a preform for drawing into an optical fibre, the preform comprising a bundle of elongate elements arranged to form a first region that becomes a cladding region of the fibre and a second region that becomes a core region of the fibre, characterised in that (a) the bundle of elongate elements comprises a plurality of elongate elements of a lower purity dielectric material and at least one elongate element of a higher purity dielectric material and (b) the first region comprises a plurality of the lower purity elements and the second region comprises the higher purity element.

Also according to the invention there is provided an optical fibre, the fibre comprising a cladding region and a core region, characterised in that the cladding region comprises dielectric material of a lower purity and the core region comprises dielectric material of a higher purity.

Preferably, the cladding region comprises a plurality of elongate bodies of a first refractive index, embedded in a matrix material of a second refractive index. Preferably, the elongate bodies are elongate holes. The core region may include material of a lower purity. The cladding region may include material of a higher purity.

An embodiment of the invention will now be described, by way of example only, with reference to the drawings, of which: Fig. 1 is a perspective view of preform, according to the invention, formed of a bundle of tubes and canes; Fig. 2 is a cross-sectional view of a fibre drawn from the preform of Fig. 1; Fig. 3 is an image of the intensity of light in a guided mode in a microstructured fibre. Fig. 4 is a perspective view of another preform according to the invention. Fig. 5 is a perspective view of another preform according to the invention.

The preform of Fig. 1 comprises a bundle 10 of elongate silica tubes 20 that are arranged in a triangular lattice pattern in the cross-section of the bundle. The bundle is held together by a silica jacket 40. The silica forming the tubes is HOQ310 from Heraeus QuartzTech Ltd., 1 Craven Court, Canada Road, Byfleet, Surrey, KT14 7JL, which has a bubble class of 2 to 3 and 30 ppm OH⁻. At the centre of the bundle is an elongate cane 50 of solid silica. The silica forming the cane is glass manufactured by the VAD process, which has a bubble class of 0 and < 3 ppm OH⁻.

The bundle 10 is drawn on a fibre drawing tower into fibre 110 (Fig. 2) in the same way as standard fibres are typically drawn from their preforms. In fibre 110, tubes 20

have fused to form an array of holes 130 and silica matrix regions 120 (in which holes 130 are embedded). At the centre of the fibre 110, the translational symmetry of the triangular lattice pattern of the holes 130 is broken. At the site of the defect that breaks the symmetry is region 150 (marked by a dotted line), which is formed of the high-purity glass of cane 50. The outer parts of fibre 140 are a silica jacket region 140 that does not contain any holes and is derived from jacket 40. Silica regions 120, 140, 150 have all fused to form a whole broken only by holes 130 and interstitial holes (not shown in Fig. 2) that result from imperfect tiling of the tubes 20 and cane 50 (which are of circular cross-section).

Light is guided in fibre 110 by a form of total internal reflection. Holes 130 reduce the effective refractive index of the parts of the fibre in which they are present. (The effective refractive index of those parts will be between the refractive index of the air in hole 130 and the refractive index of silica regions 120; the exact value of the effective refractive index depends upon the distribution of light in the fibre and can readily be calculated by methods known to those skilled in the art.) As solid silica region 150 has a higher refractive index than the effective refractive index of regions containing holes 130, regions containing holes 130 act as a cladding region that confines light by total internal reflection to a core region in and around solid region 150. It should be noted that the holes 130 are arranged on a triangle lattice as a result of their method of manufacture. There is no requirement for strict periodicity of holes in an index-guiding PCF.

The core region of fibre 140 is regarded as those parts of the fibre in which light is guided rather than evanescent. Light mode 260 in Fig. 3 is typical of the guided mode of a fibre having the hole structure of the fibre of Fig. 2. Mode 260 substantially fills the solid silica region between innermost holes 230 and also spreads between those holes, forming a six-pointed star-like shape. The intensity of mode

260 is at its highest in the centre and most of the light energy is within the region corresponding to higher-purity region 150 of the fibre of Fig. 2. However, the area of mode 260 also spreads considerably into regions 220, corresponding to lower purity regions 120.

Because most of the light energy guided in the fibre of Fig. 2 is in the high-purity region 150, the loss seen by that light is low. The effect of spread into the lower purity regions 220 is not significant because relatively little light energy is guided in those regions, even though a significant fraction of the cross-sectional area of the guided mode spreads into those lower-purity regions. Thus a low-loss PCF 110 is provided by the use of only one high purity element, cane 50. The cost and difficulty of making fibre 110 is thus considerably less than the cost of making a similar fibre entirely from the higher-purity glass of which cane 50 is comprised.

In an alternative embodiment (Fig. 4) preform 300 is similar to that of Fig. 1 but the core region is drawn from a group of seven high-purity canes 350, six of which replace the innermost ring of tubes 20. Tubes 320 surround the seven canes and form a cladding region. Such an arrangement is useful for providing a PCF with a large core region for supporting several modes.

In a further alternative embodiment (Fig. 5), preform 400 is similar to that of Fig. 1, but an innermost ring of tubes 425 is also made of the higher purity glass (in addition to cane 450). Tubes 420, which surround tubes 425, are of the lower purity glass and form a higher-purity part of the cladding region in the drawn fibre. Such an arrangement ensures that a greater fraction of the guided mode propagates through higher-purity material.

Claims

1. A method of manufacturing an optical fibre, comprising:

(i) forming a preform for drawing into the fibre, the
5 preform comprising a bundle of elongate elements arranged to
form a first region that becomes a cladding region of the
fibre and a second region that becomes a core region of the
fibre;

(ii) drawing the preform into the fibre,
10 characterised in that (a) the bundle of elongate elements
comprises a plurality of elongate elements of a lower purity
dielectric material and at least one elongate element of a
higher purity dielectric material and (b) the first region
comprises a plurality of the lower purity elements and the
15 second region comprises the higher purity element.

2. A method as claimed in claim 1, in which the second
region comprises a plurality of higher purity elements.

3. A method as claimed in claim 1 or claim 2, in which the
first region includes at least one higher purity element.

20 4. A method as claimed in claim 3, in which the first region
includes a ring of higher purity elements that substantially
surround, and are adjacent to, the second region.

5. A method as claimed in claim 1 or claim 2, in which the
second region includes at least part of at least one of the
25 lower purity elements, such that the core region of the drawn
fibre includes lower purity material as well as higher purity
material.

6. A method as claimed in claim 5, in which the second
region includes at least part of the elements forming an
30 innermost ring of lower purity elements that substantially
surround, and are adjacent to, the higher purity element(s).

7. A method as claimed in claim 6, in which the only parts of
the elements forming the ring that are included in the second
region are the parts of the elements adjacent to the cane.

35 8. A method as claimed in any preceding claim, in which the
drawn fibre is a photonic crystal fibre such that the cladding

region of the drawn fibre comprises a plurality of elongate bodies of a first refractive index embedded in a matrix material of a second refractive index, different from the first.

5 9. A method as claimed in claim 8, in which the lower purity elements comprise an outer portion that forms the matrix material and an inner portion that forms the elongate body, in the cladding region of the drawn fibre.

10 10. A method as claimed in claim 9, in which the lower purity elements are dielectric tubes, such that the inner portion is a hole.

11. A method as claimed in any preceding claim, in which the higher purity element(s) is/are a cane or canes.

12. A preform for drawing into an optical fibre, the preform
15 comprising a bundle of elongate elements arranged to form a first region that becomes a cladding region of the fibre and a second region that becomes a core region of the fibre, characterised in that (a) the bundle of elongate elements
20 comprises a plurality of elongate elements of a lower purity dielectric material and at least one elongate element of a higher purity dielectric material and (b) the first region comprises a plurality of the lower purity elements and the second region comprises the higher purity element.

13. An optical fibre, the fibre comprising a cladding region
25 and a core region, characterised in that the cladding region comprises dielectric material of a lower purity and the core region comprises dielectric material of a higher purity.

14. A fibre as claimed in claim 13, in which the cladding
30 region comprises a plurality of elongate bodies of a first refractive index, embedded in a matrix material of a second refractive index.

15. A fibre as claimed in claim 14, in which the elongate bodies are elongate holes.

16. A fibre as claimed in any of claims 13 to 15, in which
35 the core region includes material of a lower purity.


17. A fibre as claimed in any of claims 13 to 15, in which the cladding region includes material of a higher purity.

18. A method substantially as herein described with reference to the accompanying drawings.



5 19. An optical device substantially as herein described, with reference to the accompanying drawings.

1/4

Fig. 1

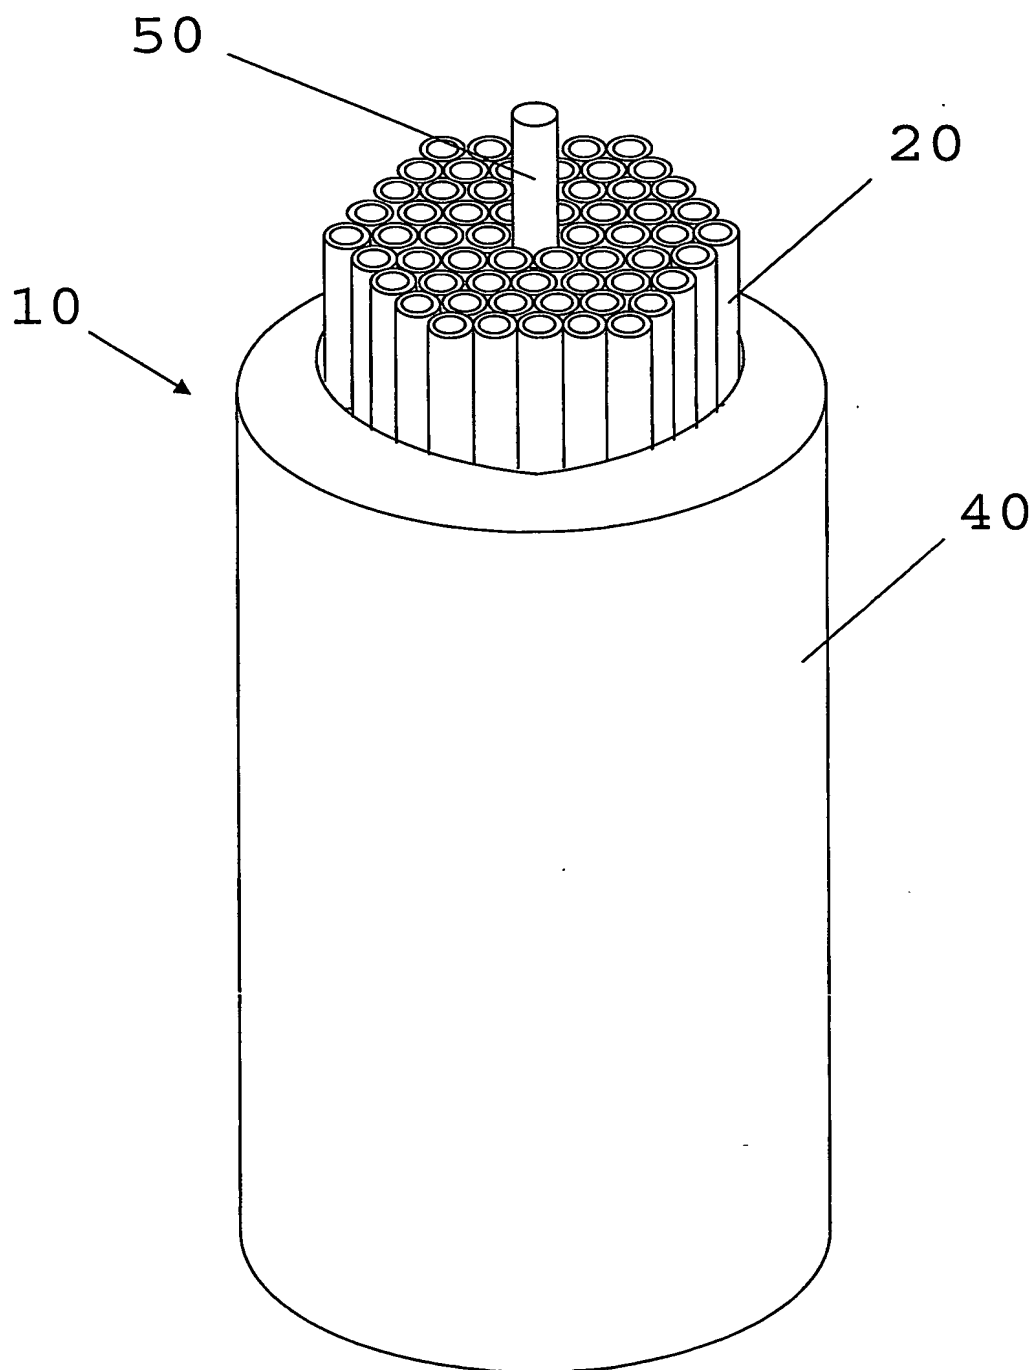


2/4

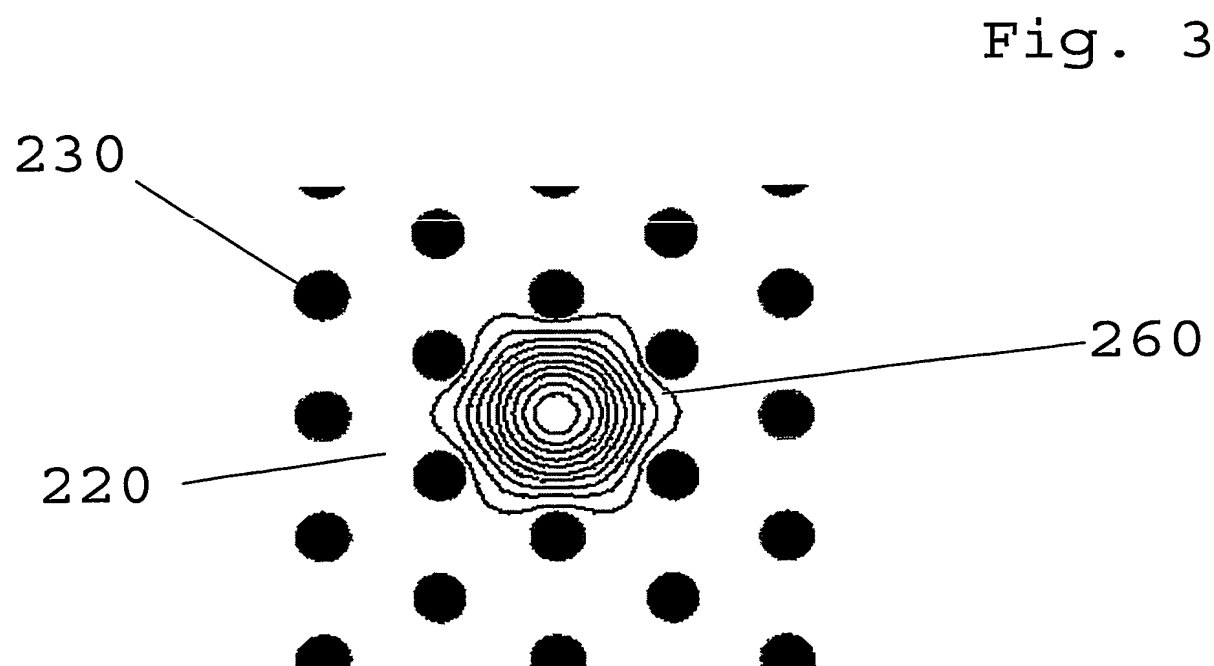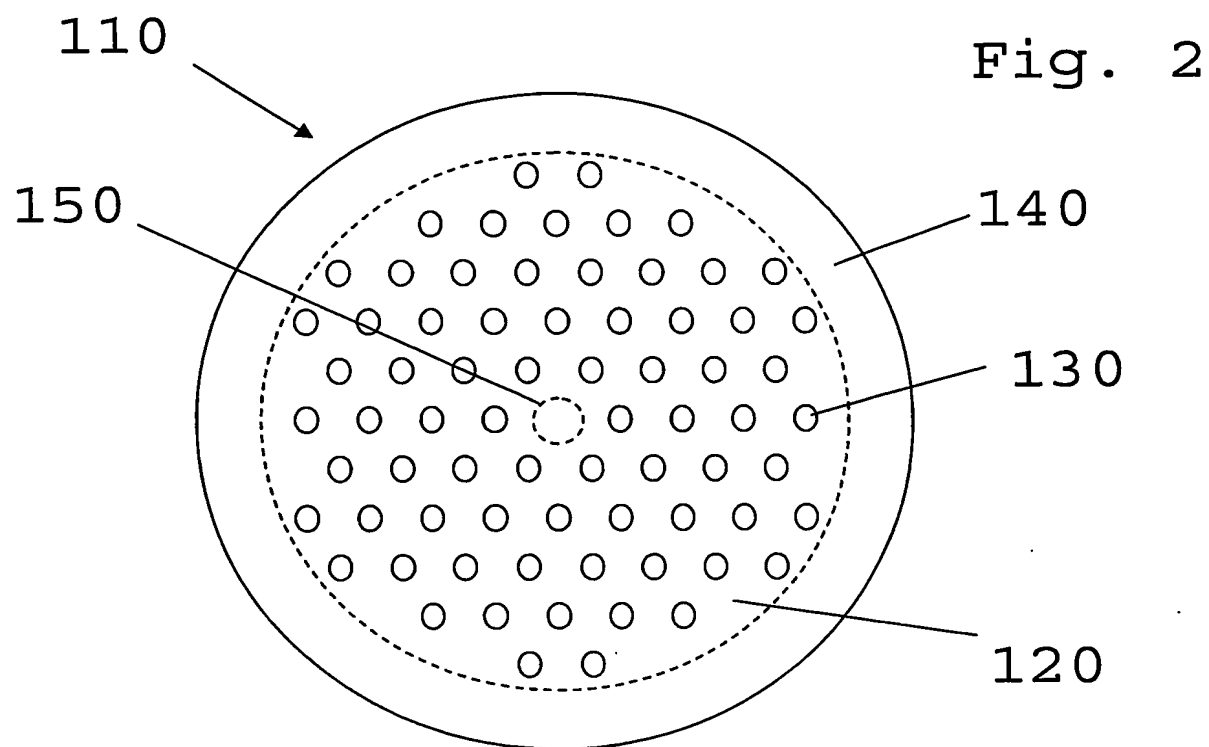


3/4

Fig. 4

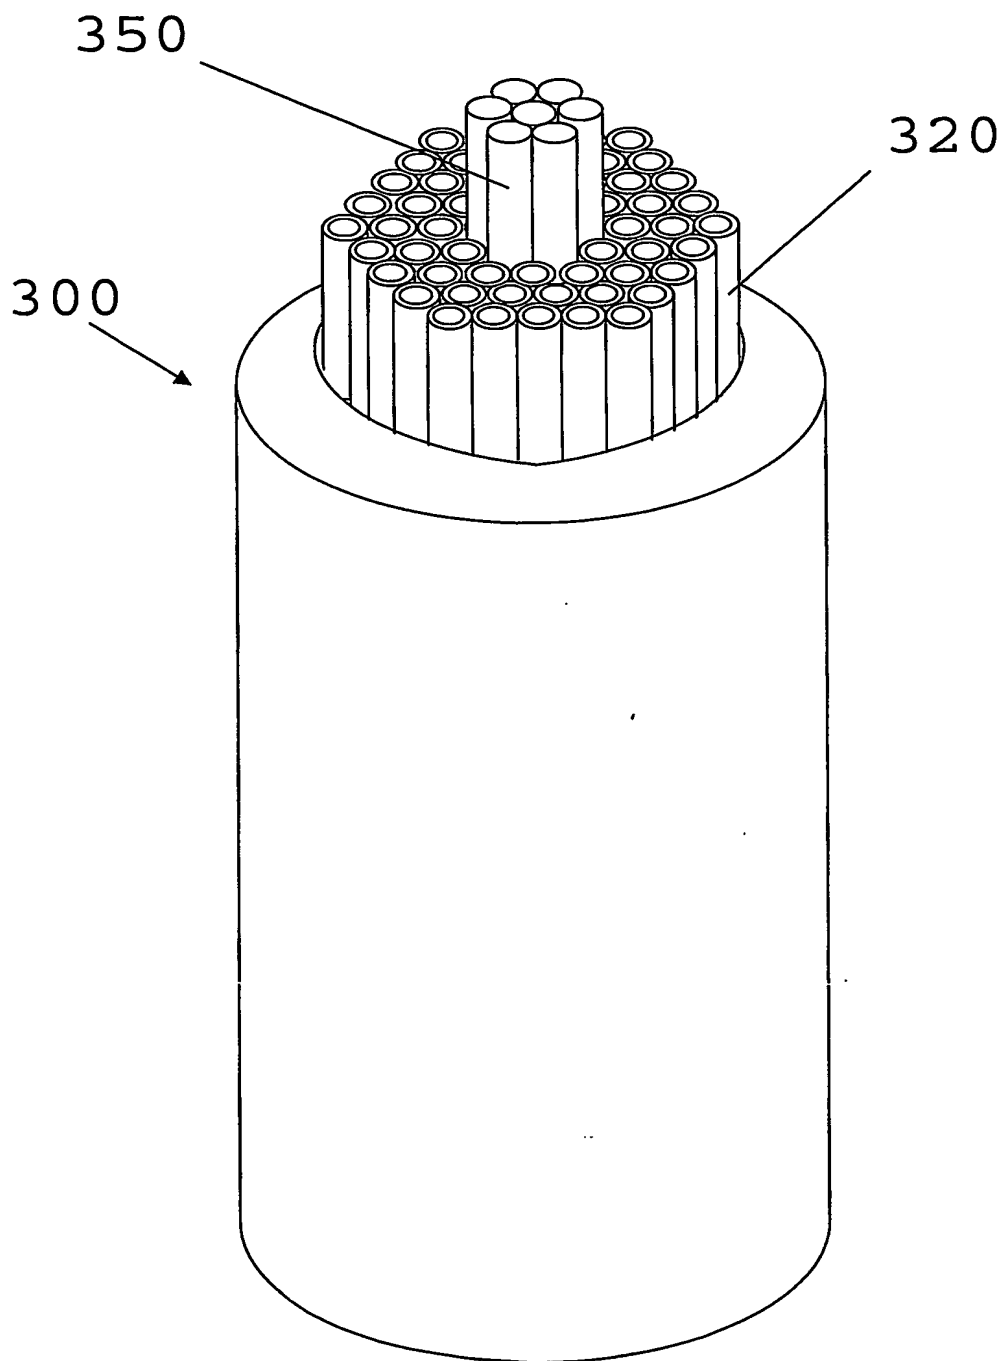

4/4

Fig. 5

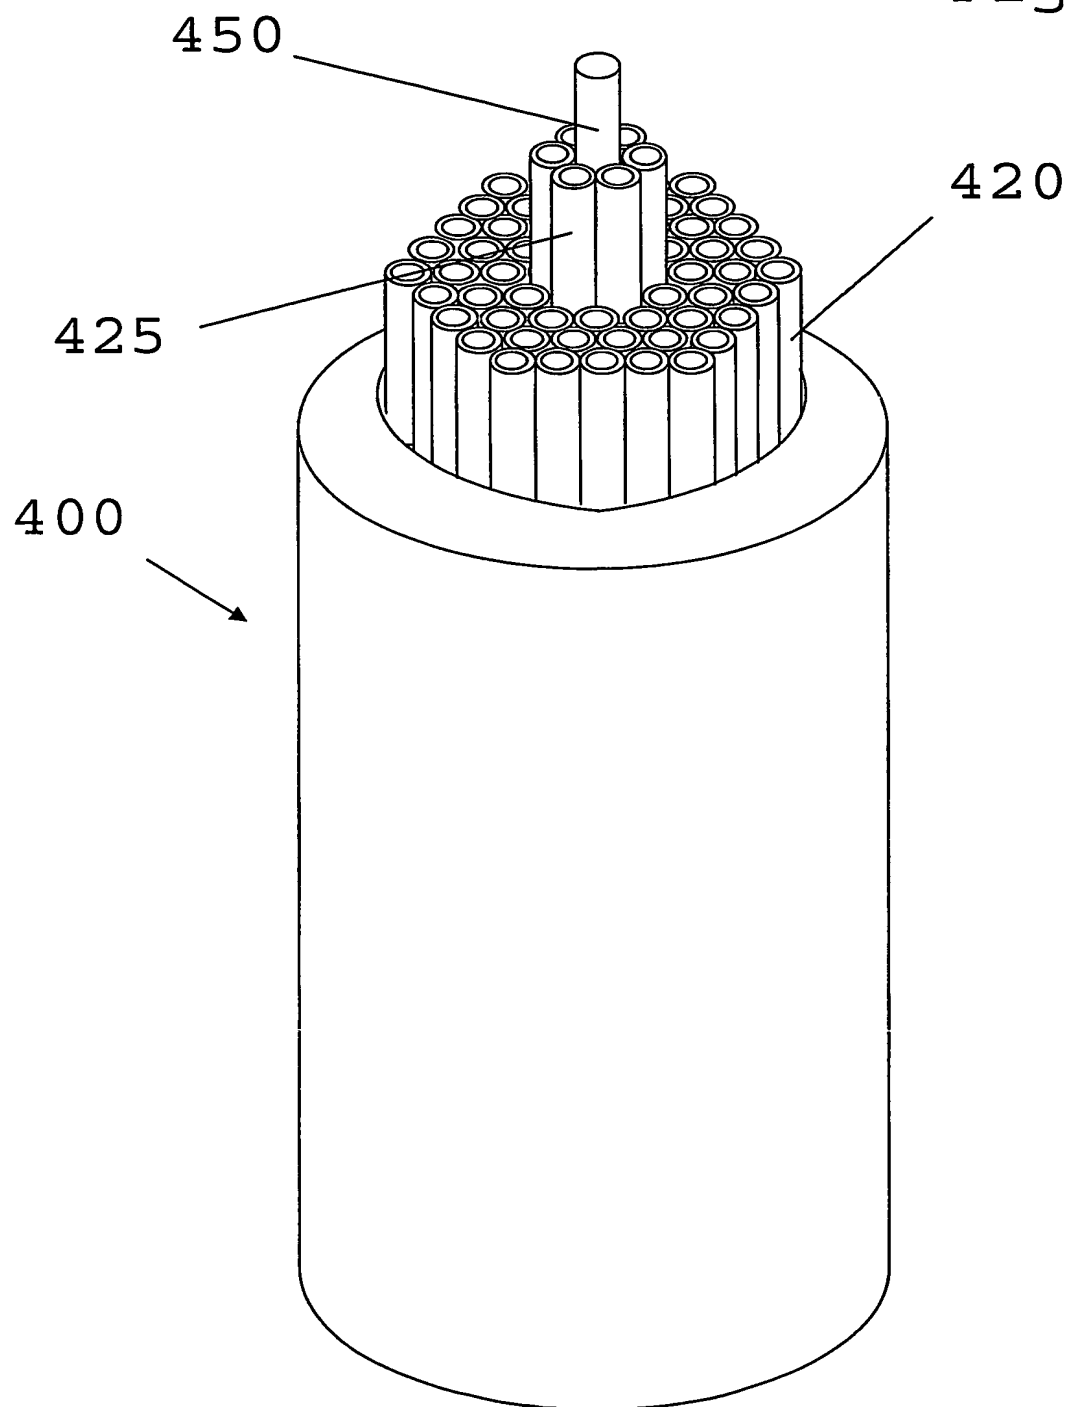

INTERNATIONAL SEARCH REPORT

 Inter Application No
 PCT/GB 03/00289

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 C03B37/075 C03B37/012 G02B6/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

 Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 C03B G02B C03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	EP 1 234 806 A (SUMITOMO ELECTRIC INDUSTRIES) 28 August 2002 (2002-08-28) column 4, line 9-19 column 4, line 32-34; figure 6 abstract	1-17
X	WO 01 96919 A (GAZILLION BITS INC) 20 December 2001 (2001-12-20) page 1, line 20-23 page 5, line 24-26 page 15, line 23-25; figures 1,2 abstract	1-17
X	US 6 243 522 B1 (BORRELLI NICHOLAS FRANCIS ET AL) 5 June 2001 (2001-06-05) column 1, line 47-50; claim 1; figure 8 abstract	1-17
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

9 April 2003

Date of mailing of the international search report

07. 07. 2003

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

LINDA MELIN / ELY

INTERNATIONAL SEARCH REPORT

Inter... Application No
PCT/GB 03/00289

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>WO 99 64903 A (BARKOU STIG EIGIL ;BJARKLEV ANDERS OVERGAARD (DK); BROENG JES (DK)) 16 December 1999 (1999-12-16) page 45, line 21-31; claims 1,66,76,78 -----</p>	1-17

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB 03/00289

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 18 and 19
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box 1.2

Claims Nos.: 18 and 19

Claims 18 and 19 are wide and undetermined in scope since they refer to everything disclosed in the application, and specifically the drawings. Therefore, claims 18 and 19 are not in accordance with PCT Article 6. According to PCT Search Guidelines, chapter III: 3.7, no special effort need be made for searching unduly wide or speculative claims. See also PCT Rule 6.2a, according to which the claims shall not, except where absolutely necessary, refer to the description or drawings. It cannot be considered necessary to make such a reference in this case.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

INTERNATIONAL SEARCH REPORT

Inter Application No

PCT/GB 03/00289

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1234806	A	28-08-2002	JP 2002249335 A EP 1234806 A2 US 2002118938 A1	06-09-2002 28-08-2002 29-08-2002
WO 0196919	A	20-12-2001	US 6418258 B1 WO 0196919 A1 US 2002031303 A1 US 2002031319 A1 US 2002037136 A1 US 2002012512 A1	09-07-2002 20-12-2001 14-03-2002 14-03-2002 28-03-2002 31-01-2002
US 6243522	B1	05-06-2001	AU 2958700 A CA 2355678 A1 CN 1331808 T EP 1147438 A1 JP 2002533290 T WO 0037974 A1	12-07-2000 29-06-2000 16-01-2002 24-10-2001 08-10-2002 29-06-2000
WO 9964903	A	16-12-1999	AU 755223 B2 AU 3026099 A AU 755547 B2 AU 3810699 A CA 2334510 A1 CA 2334554 A1 WO 9964904 A1 WO 9964903 A1 EP 1086393 A1 EP 1086391 A1 JP 2002517793 T JP 2002517794 T NZ 509201 A US 6539155 B1	05-12-2002 30-12-1999 12-12-2002 30-12-1999 16-12-1999 16-12-1999 16-12-1999 16-12-1999 28-03-2001 28-03-2001 18-06-2002 18-06-2002 26-11-2002 25-03-2003